

Assessment of lignocellulosic nut wastes as an absorbent for gaseous formaldehyde

Stefanowski, Bronia; Curling, Simon; Ormondroyd, Graham

Industrial Crops and Products

DOI:

[10.1016/j.indcrop.2017.01.012](https://doi.org/10.1016/j.indcrop.2017.01.012)

Published: 01/04/2017

Peer reviewed version

[Cyswllt i'r cyhoeddiad / Link to publication](#)

Dyfyniad o'r fersiwn a gyhoeddwyd / Citation for published version (APA):

Stefanowski, B., Curling, S., & Ormondroyd, G. (2017). Assessment of lignocellulosic nut wastes as an absorbent for gaseous formaldehyde. *Industrial Crops and Products*, 98(April), 25-28. <https://doi.org/10.1016/j.indcrop.2017.01.012>

Hawliau Cyffredinol / General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal ?

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Assessment of lignocellulosic nut wastes as an absorbent for gaseous formaldehyde

Stefanowski B.K¹, Curling S.F¹, Ormondroyd G.A^{1,2}

¹The BioComposites Centre, Bangor University, Bangor, Gwynedd, United Kingdom LL57 2UW

² Department of Architecture and Civil Engineering, University of Bath, Claverton Down, Bath, BA2 7AY, UK

Corresponding author: Stefanowski B.K (b.stefanowski@bangor.ac.uk)

Abstract

Indoor air quality is of growing concern with a current focus on formaldehyde emissions and sick building syndrome (SBS). One of the main approaches to reduce indoor pollutant concentrations has been to reduce formaldehyde use and emissions from products. Another approach is the potential of materials to act as scavengers to actively sequester formaldehyde from the indoor atmosphere. This paper evaluates the use of the shells of various types of nuts, which are an abundant agricultural waste material. Nut shells were exposed to gaseous formaldehyde using a Dynamic Vapour Sorption system and their nitrogen content determined using the Kjeldahl method. It was found that formaldehyde absorption increased with increasing nitrogen content and that walnut shell, peanut shell and sunflower seed shell could absorb significantly higher quantities of formaldehyde gas than a sheep wool control.

Key words: Nut waste, Dynamic Vapour Sorption, Formaldehyde, Kjeldahl, Absorption

1. Introduction

Indoor air quality and the effects of airborne contamination on human health, has been of growing concern in recent years (Mitchell et al., 2007; Salthammer et al., 2003; Takeda et al., 2009). It was reported that a significant proportion of the population suffer from eye and respiratory discomfort, headaches and feeling of lethargy linked to poor indoor air quality (Haghighat and De Bellis, 1998). This situation is now referred to as sick building syndrome (SBS) (Zhang and Xu, 2003). Formaldehyde (CH₂O) has been the focus of many investigations as it contributes to poor indoor air quality. Formaldehyde occurs naturally in the environment and is present and reversibly bound in all biological material (Trézl et al., 1997) and is used in many industrial products emit formaldehyde from textiles to disinfectants. A major source of formaldehyde is in pressed wood products, used in construction and furnishings (Hun et al., 2010; Kim et al., 2010). Current guidelines stipulate a limit of 0.1 mg/m³ in interior air to avoid adverse health effects (WHO, 2010). Historically there has been considerable research into the reductions of formaldehyde emissions from their original source, namely replacing formaldehyde based resins with bio-based resins (Jiang et al., 2002; Pratelli et al., 2013). Another method is to actively modify a product to sequester VOCs, for example using cost effective lignocellulosic scavengers (Kim, 2009).

Edible nuts are grown and cultivated in a variety of climates around the world on different scales. This enormous production of nuts every year generates a considerable amount of lignocellulosic waste. Table 1 summarises the cultivation, annual seed and waste production

and uses of 6 globally popular edible nuts. All of the mentioned wastes have demonstrated the potential to be used as an activated carbon for absorbing pollutants: walnut can be used as absorbent of copper ions (Kim et al., 2001), pistachio nut can remove organic compounds from air and water (mo Nor et al., 2013; Tavakoli Foroushani et al., 2016), coconut can remove methylene blue in aqueous solutions (Tan et al., 2008), sunflower seed shell (el-Halwany, 2013) and peanut shell can act as absorbents of CO₂ (Deng et al., 2015). This paper aims to evaluate and describe the potential of using these 6 promising agricultural wastes, in their natural, solid state for the adsorption of formaldehyde from the atmosphere to improve indoor air quality.

Table 1: 6 major edible nuts, their source and annual production

| Nut | Sourced | Annual production | Waste |
|--|---|--|---|
| Almonds (<i>Prunus dulcis</i>) | Grown worldwide. North America, California greatest producer ⁴ (>637,000 tonnes/year) ² | 2.09 million tonnes ¹ | 0.7-1.5 million tonnes waste per year and has little industrial value ¹ |
| Walnut (<i>Juglans regia</i>) | 17 major producers ³ . China largest producer (410,000 tonnes /year) ⁵ , North America the 2 nd (300,000 tonnes/year) ¹⁶ and Iran is the 3 rd (150,000 tonnes/year) ³ | 1.48 million tonnes ³ | Multitudinous uses from dye in cosmetics, used in insecticides, fillers, asphalt, glues ⁴ and improving tyre grip ³ |
| Pistachio (<i>Pistacia vera</i>) | Grown mainly in Iran, Turkey and North America. Iran alone producing (>250,000 tonnes/year) ^{7,8} | 489,000 tonnes ⁶ | Little industrial value, sent to landfill or burnt ¹⁹ and small use in mordant ⁴ and colouring and glues ²⁰ |
| Coconut (<i>Cocos nucifera</i>) | Indonesia is the leading producer, followed by Philippines, India and Sri Lanka ¹⁶ . Malaysia alone requires 151,00ha of land for production ⁹ | 5.5 million tones ¹⁶ | Husk used for rope and matts and core can be used as peat substitute ¹⁸ . 13.6 – 18.14 million tonnes husk waste per annum ¹⁷ |
| Peanut (<i>Arachis hypogaea</i>) | Grown worldwide. China 1 st in production accounting for 40% of global production ¹⁰ (14.5 tonnes/year), followed by India (23%) ¹² . | 32.22 million tonnes (including shell) ¹¹ | Largely sold in shell or sent to landfill |
| Sunflower seeds (<i>Helianthus annuus</i>) | Grown worldwide. North American alone produces 1.72 million tonnes/year ¹⁵ | 27 million tonnes ¹³ (Almost exclusively cultivated for oil ¹⁴) | Small value, sent to landfill or used as low grade roughage for livestock ¹⁵ , |

Data derived from: (Pirayesh and Khazaeian, 2012)¹, (Jayasena, 2016)², (Malhotra, 2008)³, (Wickens G E, 1995)⁴, (Sze-Tao and Sathe, 2000)⁵, (Kahyaoglu, 2008)⁶, (Kashaninejad et al., 2006)⁷, (Razavi et al., 2007)⁸, (Tan et al., 2008)⁹, (Diop et al., 2004)¹⁰, (Zhang et al., 2012)¹¹, (Zhang et al., 2013)¹², (Li et al., 2011)¹³, (Hameed, 2008)¹⁴, (Kamireddy et al., 2014)¹⁵, (Anirudhan and Sreekumari, 2011)¹⁶, (van Dam et al., 2004)¹⁷, (Konduru et al., 1999)¹⁸, (Tavakoli Foroushani et al., 2016)¹⁹, (Fadavi et al., 2013)²⁰

It is known that formaldehyde is highly reactive to proteins (Mansour et al., 2016) and reacts with the side chains of amino acids and amido groups of glucose (Curling et al., 2012). The nitrogen (protein) content was therefore determined to assess correlations with formaldehyde sorption. It is known that wool fibre will absorb formaldehyde (Curling et al., 2012) by physisorption, (absorbed into micropores within its structure) and chemisorption (forms a stable bond with the fibres). Wool fibre has therefore been used in this study as a comparative control.

2. Materials and Methods

2.1 Nut shell Waste and Wool

The shell material was dry and oil free and crushed into small pieces (<3mm) and removing any contaminating (non shell) material. Scoured wool fibre was also analysed as a control material for formaldehyde absorption. Urea is a very common chemical added to materials used to absorb free formaldehyde emitted from formaldehyde based products such as particleboard. However the purpose of this study is to evaluate the potential of lignocellulosic wastes used as a protein additive, to absorb ambient formaldehyde emitted from external sources other than reducing a products' formaldehyde emissions. As such, urea is beyond the scope of this study.

2.2 Dynamic Vapour Sorption (DVS)

Prior to the experiment, the nut shells and wool were conditioned at 23 ± 1 °C and $60 \pm 3\%$ RH until constant mass was obtained. Sorption analyses were performed using DVS system (Surface Measurement Systems, London, UK) in accordance with the methodology described by Curling *et al.* (2012). Three replicates were conducted for each sample.

2.3 Nitrogen content

To determine the nitrogen content of the waste nut shells, the Kjeldahl method was used. Three replicates were completed for each nut shell and wool.

The shell materials were prepared by dry milling the shells into <5mm pieces and removing any contaminating material. The material was then oven dried overnight in a 50°C oven. Between 0.2g and 0.3g of the oven dried waste shell, weighed to four decimal places, and were placed into digestion tubes to which two Kjeldahl peroxide tablets and 12ml of sulphuric acid were added. The digestion tubes were then placed in a preheated (420°C) digester and left to digest for 1 hour from time of first vapour sighting. Once digestion was complete the cooled samples were transferred to the distilling unit. The distilled sample was removed for titration. Hydrochloric acid (HCl) was titrated into the sample until it became neutral (clear) with the volume of HCl recorded. The nitrogen content was calculated using equation 1:

$$\% N = 14.01 \times ((t_s - t_b)/m) \times M_{sd} \quad [\text{Equation 1}]$$

Where: t_s ml of titration of sample, t_b ml of titration blank, m oven dry weight of sample and M_{sd} molarity of standard HCl (0.01).

3. Results and Discussion

Table 2 and fig 1 show the maximum formaldehyde absorption by the different shell wastes and wool fibre.

Table 2: Formaldehyde absorption by shell waste and wool fibre and their nitrogen content

| Scavenger | Formaldehyde absorption (g kg ⁻¹) | SD | Nitrogen content (%) | SD |
|-----------------------------|--|------|-------------------------|------|
| Wool | 49.80 | 0.35 | 17.16 | 0.02 |
| Walnut shell | 90.19 | 0.91 | 1.12 | 0.22 |
| Almond shell | 64.86 | 0.67 | 0.26 | 0.11 |
| Coconut husk fibre | 49.29 | 0.52 | 0.31 | 0.00 |
| Pistachio shell | 31.70 | 0.49 | 0.10 | 0.01 |
| Peanut shell | 81.48 | 0.43 | 0.73 | 0.03 |
| Sunflower seed shell | 101.97 | 0.22 | 4.17 | 0.18 |

Figure 1 shows the mass change of each waste shell and wool fibre, over 6 cycles (6 cycles was chosen based on previous experience). The graph reveals there is a rapid mass change in the first cycle and then generally a gradual increase, except for coconut husk fibre, pistachio shell and wool fibre, which appear to have reached a maximum absorption. The other four shell wastes did not reach equilibrium in the 6 cycles. Theoretical maximum absorption values were determined via regression of the absorption curves for the Almond (65.25 g kg⁻¹), Walnut (92.88 g kg⁻¹), Sunflower (117.313 g kg⁻¹) and Peanut (81.52 g kg⁻¹). The calculated values for almond and peanut are within the standard deviation of the observed values with only the walnut and sunflower giving theoretical values outside the standard deviation of the observed.

The nitrogen content was analysed to determine if there was a relationship between protein content and formaldehyde absorption. Table 2 also shows the Kjeldahl nitrogen content results of the waste shells and wool fibre. The higher nitrogen content of sunflower seed shell, walnut shell and peanut shell (4.17%, 1.12% and 0.73% respectively) correlates with their higher capacity to absorb formaldehyde (101.97 g kg⁻¹, 90.19 g kg⁻¹ and 81.48 g kg⁻¹ respectively). However, it appears the wool fibre values do not fit this relationship. Wool has a significantly higher nitrogen content 17.16%, as it is of a protein structure, but it absorbed significantly less formaldehyde (49.80 g kg⁻¹), than the top three shell waste scavengers. The Kjeldahl method measures total nitrogen and therefore may detect non protein nitrogen compounds within the wool.

The reactions between formaldehyde and other compounds and molecules is very complex, as formaldehyde has low specificity and will readily react with a number of compounds in different ways (Reddie and Nicholls, 1971). The reactions between wool and formaldehyde are very complex. Polyamides form the backbone of the wool proteins and are comprised of many functional groups, each with varying reactivity (Reddie and Nicholls, 1971). The wool keratin reacts with formaldehyde and formaldehyde irreversibly binds to asparagine amide groups of the wool (Alexander et al., 1951; Middlebrook, 1949).

It is well reported that formaldehyde will react and bind with amino groups and result in the formation of a methylol derivative (Alexander et al., 1951; Levy and Silberman, 1937; Puchtler and Meloen, 1984; Reddie and Nicholls, 1971). Other crosslinks are formed between amine and amide, amine and phenol and amine and indole groups (Alexander et al., 1951). Lignocellulosic wastes composition contain a wide variety of functional groups (Altun and Pehlivan, 2012; Miretzky and Cirelli, 2010; Okuda et al., 2003; Reddie and Nicholls, 1971; Zitouni et al., 2000). The predominant amino acids found in the lignocellulose material varies with species; walnut contains lysine, in almonds cysteine and methionine and peanut threonine and methionine (Venkatachalam and Sathe, 2006). These differences in the type, composition and quantity of the functional groups may be key factors in determining the ability of a material to absorb and bind formaldehyde. Determination of the different types of functional groups on these waste nut shells may help to explain the differences observed in the quantity of formaldehyde absorbed by the shells and wool. Physical factors may also play an important role as there may be differences due to access via diffusion into the materials and due to different quantities of active nitrogen sites.

4. Conclusions

The purpose of this study was to determine if low cost and unutilised waste nut shell could be used in their natural state to absorb formaldehyde. The study reveals that all the 6 shell types can absorb formaldehyde, with pistachio nut shell absorbing the least and sunflower seed shell absorbing the greatest amount. The Kjeldahl results revealed that the amount of formaldehyde absorbed increased as nitrogen content within the shells increased. To conclude, sunflower seed shell, peanut shell, almond and walnut shell biowaste could be better utilised as organic scavengers to absorb formaldehyde from the atmosphere and improve indoor air quality.

5. References

- Alexander, P., Carter, D., Johnson, K.G., 1951. Formation by formaldehyde of a cross-link between lysine and tyrosine residues in wool. *Biochem. J.* 48, 435–441.
- Altun, T., Pehlivan, E., 2012. Removal of Cr(VI) from aqueous solutions by modified walnut shells. *Food Chem.* 132, 693–700. doi:10.1016/j.foodchem.2011.10.099
- Anirudhan, T.S., Sreekumari, S.S., 2011. Adsorptive removal of heavy metal ions from industrial effluents using activated carbon derived from waste coconut buttons. *J. Environ. Sci.* 23, 1989–1998. doi:10.1016/S1001-0742(10)60515-3
- Curling, S.F., Loxton, C., Ormondroyd, G.A., 2012. A rapid method for investigating the absorption of formaldehyde from air by wool. *J. Mater. Sci.* 47, 3248–3251. doi:10.1007/s10853-011-6163-7
- Deng, S., Hu, B., Chen, T., Wang, B., Huang, J., Wang, Y., Yu, G., 2015. Activated carbons prepared from peanut shell and sunflower seed shell for high CO₂. *Adsorption* 21, 125–133. doi:10.1007/s10450-015-9655-y
- Diop, N., Beghin, J.C., Sewadeh, M., 2004. Global Agricultural Trade and Developing Countries - ISBN: 0821358634 - GATChapter12.pdf [WWW Document]. URL <http://siteresources.worldbank.org/INTPROSPECTS/Resources/GATChapter12.pdf> (accessed 5.31.16).
- el-Halwany, M.M., 2013. Kinetics and Thermodynamics of Activated Sunflowers Seeds Shell Carbon (SSSC) as Sorbent Material. *J. Chromatogr. Sep. Tech.* 4. doi:10.4172/2157-7064.1000183

- Fadavi, A., Hassan-Beygi, S.R., Karimi, F., 2013. Moisture dependent physical and mechanical properties of Syrjan region wild pistachio nut. *Agric. Eng. Int. CIGR J.* 15, 221–230.
- Haghighat, F., De Bellis, L., 1998. Material emission rates: Literature review, and the impact of indoor air temperature and relative humidity. *Build. Environ.* 33, 261–277. doi:10.1016/S0360-1323(97)00060-7
- Hameed, B.H., 2008. Equilibrium and kinetic studies of methyl violet sorption by agricultural waste. *J. Hazard. Mater.* 154, 204–212. doi:10.1016/j.jhazmat.2007.10.010
- Hun, D.E., Corsi, R.L., Morandi, M.T., Siegel, J.A., 2010. Formaldehyde in residences: long-term indoor concentrations and influencing factors. *Indoor Air* 20, 196–203. doi:10.1111/j.0905-6947.2010.00644.x
- Jayasena, S.H., 2016. Purification and Characterization of Select Glycoproteins of Almonds (*Prunus Dulcis* L.).
- Jiang, T., Gardner, D.J., Baumann, M.G.D., 2002. Volatile organic compound emission arising from the hot-pressing of mixed-hardwood particleboard. *For. Prod. J.* 52, 66–77.
- Kahyaoglu, T., 2008. Optimization of the pistachio nut roasting process using response surface methodology and gene expression programming. *LWT - Food Sci. Technol.* 41, 26–33. doi:10.1016/j.lwt.2007.03.026
- Kashaninejad, M., Mortazavi, A., Safekordi, A., Tabil, L.G., 2006. Some physical properties of Pistachio (*Pistacia vera* L.) nut and its kernel. *J. Food Eng.* 72, 30–38. doi:10.1016/j.jfoodeng.2004.11.016
- Kim, J.-W., Sohn, M.-H., Kim, D.-S., Sohn, S.-M., Kwon, Y.-S., 2001. Production of granular activated carbon from waste walnut shell and its adsorption characteristics for Cu²⁺ ion. *J. Hazard. Mater.* 85, 301–315. doi:10.1016/S0304-3894(01)00239-4
- Kim, S., 2009. The reduction of indoor air pollutant from wood-based composite by adding pozzolan for building materials. *Constr. Build. Mater.* 23, 2319–2323. doi:10.1016/j.conbuildmat.2008.11.008
- Kim, S., Choi, Y.-K., Park, K.-W., Kim, J.T., 2010. Test methods and reduction of organic pollutant compound emissions from wood-based building and furniture materials. *Bioresour. Technol.* 101, 6562–6568. doi:10.1016/j.biortech.2010.03.059
- Konduru, S., Evans, M.R., Stamps, R.H., 1999. Coconut Husk and Processing Effects on Chemical and Physical Properties of Coconut Coir Dust. *HortScience* 34, 88–90.
- Levy, M., Silberman, D.E., 1937. The Reactions of Amino and Imino Acids with Formaldehyde. *J. Biol. Chem.* 118, 723–734.
- Li, X., Xing, W., Zhuo, S., Zhou, J., Li, F., Qiao, S.-Z., Lu, G.-Q., 2011. Preparation of capacitor's electrode from sunflower seed shell. *Bioresour. Technol.* 102, 1118–1123. doi:10.1016/j.biortech.2010.08.110
- Malhotra, S.P., 2008. *World Edible Nuts Economy*. Concept Publishing Company.
- Mansour, E., Curling, S., Stéphan, A., Ormondroyd, G., 2016. Absorption of volatile organic compounds by different wool types. *Green Mater.* 4, 1–7. doi:10.1680/jgrma.15.00031
- Middlebrook, W.R., 1949. The irreversible combination of formaldehyde with proteins. *Biochem. J.* 44, 17–23.
- Miretzky, P., Cirelli, A.F., 2010. Cr(VI) and Cr(III) removal from aqueous solution by raw and modified lignocellulosic materials: A review. *J. Hazard. Mater.* 180, 1–19. doi:10.1016/j.jhazmat.2010.04.060
- Mitchell, C.S., Zhang, J., Sigsgaard, T., Jantunen, M., Liroy, P.J., Samson, R., Karol, M.H., 2007. Current State of the Science: Health Effects and Indoor Environmental Quality. *Environ. Health Perspect.* 115, 958–964.

- Mohamad Nor, N., Lau, L.C., Lee, K.T., Mohamed, A.R., 2013. Synthesis of activated carbon from lignocellulosic biomass and its applications in air pollution control—a review. *J. Environ. Chem. Eng.* 1, 658–666. doi:10.1016/j.jece.2013.09.017
- Okuda, T., Nishijima, W., Okada, M., 2003. Chemical properties of anion-exchangers prepared from waste natural materials. *React. Funct. Polym.* 55, 311–318. doi:10.1016/S1381-5148(03)00002-6
- Pirayesh, H., Khazaeian, A., 2012. Using almond (*Prunus amygdalus* L.) shell as a bio-waste resource in wood based composite. *Compos. Part B Eng.* 43, 1475–1479. doi:10.1016/j.compositesb.2011.06.008
- Pratelli, D., Servaas, H., Phanopoulos, C., Carleer, R., Adriaenssens, P., 2013. MDI-bonded hardwood composites: some indications of the impact of MDI on formaldehyde and VOC emissions.
- Puchtler, H., Meloan, S.N., 1984. On the chemistry of formaldehyde fixation and its effects on immunohistochemical reactions. *Histochemistry* 82, 201–204. doi:10.1007/BF00501395
- Razavi, S.M.A., Emadzadeh, B., Rafe, A., Mohammad Amini, A., 2007. The physical properties of pistachio nut and its kernel as a function of moisture content and variety: Part I. Geometrical properties. *J. Food Eng.* 81, 209–217. doi:10.1016/j.jfoodeng.2006.11.003
- Reddie, R.N., Nicholls, C.H., 1971. Some Reactions Between Wool and Formaldehyde. *Text. Res. J.* 41, 841–852. doi:10.1177/004051757104101008
- Salthammer, T., Fuhrmann, F., Uhde, E., 2003. Flame retardants in the indoor environment – Part II: release of VOCs (triethylphosphate and halogenated degradation products) from polyurethane. *Indoor Air* 13, 49–52. doi:10.1034/j.1600-0668.2003.01150.x
- Sze-Tao, K.W.C., Sathe, S.K., 2000. Walnuts (*Juglans regia* L): proximate composition, protein solubility, protein amino acid composition and protein in vitro digestibility. *J. Sci. Food Agric.* 80, 1393–1401. doi:10.1002/1097-0010(200007)80:9<1393::AID-JSFA653>3.0.CO;2-F
- Takeda, M., Saijo, Y., Yuasa, M., Kanazawa, A., Araki, A., Kishi, R., 2009. Relationship between sick building syndrome and indoor environmental factors in newly built Japanese dwellings. *Int. Arch. Occup. Environ. Health* 82, 583–593. doi:10.1007/s00420-009-0395-8
- Tan, I.A.W., Ahmad, A.L., Hameed, B.H., 2008. Adsorption of basic dye on high-surface-area activated carbon prepared from coconut husk: Equilibrium, kinetic and thermodynamic studies. *J. Hazard. Mater.* 154, 337–346. doi:10.1016/j.jhazmat.2007.10.031
- Tavakoli Foroushani, F., Tavanai, H., Hosseini, F.A., 2016. An investigation on the effect of KMnO₄ on the pore characteristics of pistachio nut shell based activated carbon. *Microporous Mesoporous Mater.* 230, 39–48. doi:10.1016/j.micromeso.2016.04.030
- Trézl, L., Csiba, A., Juhász, S., Szentgyörgyi, M., Lombai, G., Hullán, L., Juhász, A., 1997. Endogenous formaldehyde level of foods and its biological significance. *Z. Für Leb. - Forsch. A* 205, 300–304. doi:10.1007/s002170050169
- van Dam, J.E.G., van den Oever, M.J.A., Teunissen, W., Keijzers, E.R.P., Peralta, A.G., 2004. Process for production of high density/high performance binderless boards from whole coconut husk: Part 1: Lignin as intrinsic thermosetting binder resin. *Ind. Crops Prod.* 19, 207–216. doi:10.1016/j.indcrop.2003.10.003
- Venkatachalam, M., Sathe, S.K., 2006. Chemical Composition of Selected Edible Nut Seeds. *J. Agric. Food Chem.* 54, 4705–4714. doi:10.1021/jf0606959
- WHO, 2010. WHO Guidelines for indoor air quality : selected pollutants [WWW Document]. WHO Guid. Indoor Air Qual. URL

http://www.euro.who.int/__data/assets/pdf_file/0009/128169/e94535.pdf (accessed 5.18.16).

Wickens G E, 1995. Non-Wood Forest Products: Edible Nuts [WWW Document]. URL <http://www.fao.org/3/a-v8929e.pdf> (accessed 5.31.16).

Zhang, G., Hu, M., He, L., Fu, P., Wang, L., Zhou, J., 2013. Optimization of microwave-assisted enzymatic extraction of polyphenols from waste peanut shells and evaluation of its antioxidant and antibacterial activities in vitro. *Food Bioprod. Process.* 91, 158–168. doi:10.1016/j.fbp.2012.09.003

Zhang, J., Liang, S., Duan, J., Wang, J., Chen, S., Cheng, Z., Zhang, Q., Liang, X., Li, Y., 2012. De novo assembly and Characterisation of the Transcriptome during seed development, and generation of genic-SSR markers in Peanut (*Arachis hypogaea* L.). *BMC Genomics* 13, 90. doi:10.1186/1471-2164-13-90

Zhang, Y., Xu, Y., 2003. Characteristics and correlations of VOC emissions from building materials. *Int. J. Heat Mass Transf.* 46, 4877–4883. doi:10.1016/S0017-9310(03)00352-1

Zitouni, N., Errahali, Y., Metche, M., Kanny, G., Moneret-Vautrin, D.A., Nicolas, J.P., Fremont, S., 2000. Influence of refining steps on trace allergenic protein content in sunflower oil. *J. Allergy Clin. Immunol.* 106, 962–967. doi:10.1067/mai.2000.110229

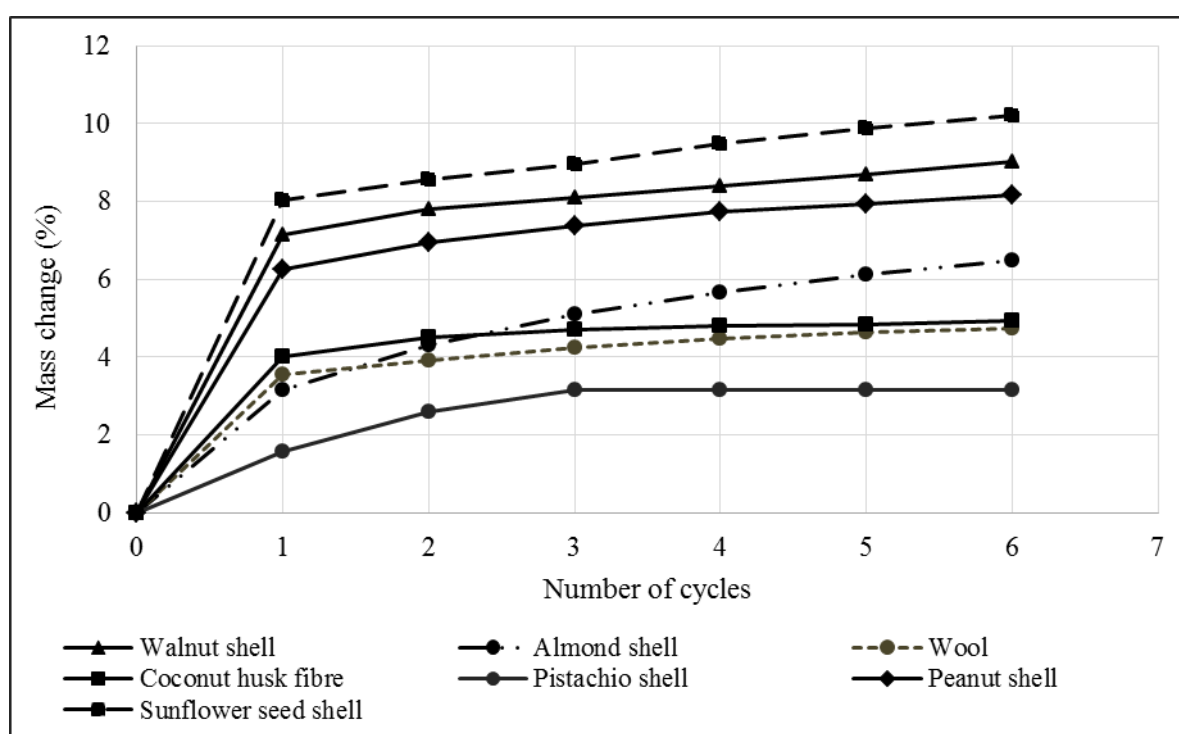


Figure 1: Shell waste and mass change over 6 cycles.