

Wave resource characterization and co-location with offshore wind in the Irish Sea

Neill, Simon

Renewable Energy

DOI:

[10.1016/j.renene.2023.119902](https://doi.org/10.1016/j.renene.2023.119902)

Published: 24/02/2024

[Cyswllt i'r cyhoeddiad / Link to publication](#)

Dyfyniad o'r fersiwn a gyhoeddwyd / Citation for published version (APA):

Neill, S. (2024). Wave resource characterization and co-location with offshore wind in the Irish Sea. *Renewable Energy*, 222, Article 119902. <https://doi.org/10.1016/j.renene.2023.119902>

Hawliau Cyffredinol / General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal ?

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Wave resource characterization and co-location with offshore wind in the Irish Sea

Simon P. Neill^a

^a*Bangor University, School of Ocean Sciences, Menai Bridge, LL59 5AB, Anglesey, UK*

Abstract

One barrier affecting progress in the wave energy sector is detailed knowledge of the spatiotemporal distribution of waves in shelf sea regions, including their inter- and intra-annual variability. Here, a recent decade (2012 – 2021) of waves is simulated at high-resolution in the Irish Sea – a region with much offshore energy infrastructure. The spectral wave model SWAN is forced with ERA5 wind fields. There is a strong seasonal cycle in wave height and power. In all months except for July, large waves (significant wave height greater than 5 m) can penetrate into the northern part of the Irish Sea, but the most energetic region is the Celtic Sea, where monthly mean wave power exceeds 30 kW/m in December. In this region, wave power strongly correlates with the North Atlantic Oscillation (NAO) from September to March. To investigate the potential for co-location, i.e. to reduce costs through shared infrastructure, wave and wind power were compared at a leased floating wind site in the Celtic Sea. Over the simulated decade, $r^2 \sim 0.5$, demonstrating modest potential for co-location of wind and wave energy technologies in this part of the Irish Sea – considerably less favourable than other sites in the North Atlantic that experience greater swell.

Keywords: Spectral wave model, Wave energy resource, Climate, Variability, Uncertainty, International Electrotechnical Commission

1. Introduction

Understanding the spatiotemporal distribution of waves in shelf sea regions, including their seasonal and inter-annual variability, is important for a range of applications and sectors. Knowledge of long term trends in waves, for example the frequency and magnitude of extreme events, contributes to

our understanding of the impacts and mitigation of climate change [1, 2]. Although tidal currents tend to dominate the transport of shelf sea sediments, particularly in sheltered regions, waves increase bed shear stress, enhancing sediment resuspension and enabling (enhancing) suspended sediment transport by weak (strong) tidal currents [3]. The contribution of waves to sediment dynamics can be used to assist mapping the evolution of sea bed sediment distribution over extended time periods – in some cases over thousands of years [4]. As well as affecting marine ecosystems and biodiversity [5], waves affect many maritime activities such as transport and offshore energy. Further, and the focus of this study, waves can be directly exploited as a form of renewable energy conversion, and hence detailed information about their spatiotemporal distribution, including how wave power varies within and between years, is important for resource assessment and characterization [6, 7].

This study focusses on the Irish Sea – a relatively shallow shelf sea environment between Ireland and Great Britain. The Irish Sea experiences complex wave dynamics that are influenced by a combination of local and large-scale meteorological factors. Waves have played a critical role in shaping the Irish Sea since the Last Glacial Maximum [4], influencing sediment transport, erosion and deposition patterns [8]. The wave climate in the Irish Sea is influenced by a combination of factors, including prevailing wind patterns, storm tracks, and local variations in bathymetry/topography, leading to significant temporal and spatial variability in wave properties across the region. The waves in some regions of the Irish Sea interact with strong tidal currents [9] and large tidal ranges [10], further complicating their spatiotemporal variability.

Wave energy resource characterization, particularly at the early stages of project development, is generally performed using numerical models, validated at discrete points in the model domain against in situ datasets, typically sourced from limited existing wave buoy observations [11]. Since phase resolving models are computationally expensive [12], such model assessments are based on (phase averaged) spectral wave models. Various popular *third generation* spectral wave models, such as WAVEWATCH III, SWAN and WAM, adopt a similar approach [13, 14]; however, one consideration between modelling frameworks is whether the grid is structured or unstructured, with the majority of wave models having both options available. In this study, since there is no focus on any particular region of the domain (as would occur if a proposed wave energy array at a known geographic location was

to be investigated), a structured (curvilinear) grid is appropriate, providing approximately consistent resolution throughout the study region. Resource assessments can include the theoretical and/or technical resource, with the latter applied once a technology type (or number of technology options) has been selected. In this study, the focus is on theoretical resource assessment (e.g. in units of available power per metre of wave crest, kW/m), since no past study has provided such an assessment for the Irish Sea. However, the outputs from the model, specifically significant wave height and energy wave period, allow for the subsequent calculation of device specific wave power, applying an available power matrix [15].

While wave energy conversion holds promising potential to displace the combustion of fossil fuels, it faces substantial technological challenges, making wave energy one of the more expensive renewable energy technologies at present [16]. One way to reduce costs is to co-locate wave energy with other maritime industries (e.g. aquaculture; [17]) or offshore energy technologies (e.g. offshore wind; [18]). In addition to reducing the costs for each technology, e.g. by sharing infrastructure, cabling and O&M programmes, the combination of multiple renewable energy conversion resources has the further advantage of providing a more balanced (aggregated) power output, provided there is low correlation between the resources [19]. Whereas such co-location potential has been demonstrated for other combinations of energy technologies that rely on weather such as wind and solar [20], wind and wave are more directly linked, since the wave climate relies on the wind climate. Therefore, weaker correlation between wind and wave is found on sites that are characterized by a substantial swell component, such as Lanzarote in the Atlantic [21] and the west coast of Ireland [19]. Areas such as the relatively enclosed (and hence less swell-dominated) North Sea have less potential for wind/wave co-location [18] since the waves tend to be in phase with the local wind. In this study (Section 4.4) the potential for co-location of wind and wave energy in the Irish Sea is investigated, since part of the region is relatively exposed to the North Atlantic.

In this study, a modelling approach is used to understand the spatiotemporal distribution of wave properties and theoretical wave power throughout the Irish Sea, and the potential for co-location with wind in the most energetic regions. Although various wave models that incorporate the Irish Sea have been developed at various spatial and temporal scales (e.g. [22, 23]), and these models are/were generally suited to their purpose, there are still a few areas that need to be addressed. One product that incorporates the

Irish Sea is the Atlantic-European North West Shelf-Wave Physics Reanalysis dataset¹. This dataset is based on the WAVEWATCH III model [24], with a model resolution of $1/33 \times 1/74^\circ$ (approximately 1.5 km), forced by ECMWF ERA5 wind fields [25]. Although such a resolution can be useful for many applications, it does not facilitate the investigation of subtle spatial changes in wave climate, for example as required for micro-siting of wave energy convertors [26]. In addition, as few models are developed for the specific purposes of wave energy resource assessment, wave energy period is rarely output as a variable, nor is the full wave spectrum routinely used to calculate wave power. Finally, a recent decade needs to be investigated, improving on studies published over a decade ago that encompass the Irish sea (e.g. [27]). The methodology in this study adheres to the IEC (International Electrotechnical Commission) Technical Specification 62600-101 [11], following a *Class 2* (feasibility) resource assessment. A Class 2 resource assessment is the level of assessment conducted prior to undertaking a design level assessment.

2. Study region – the Irish Sea

The Irish Sea has overall dimensions of around 200×400 km. It connects to the Celtic Sea in the south through St. George’s Channel, and to the Malin Sea in the North through the North Channel (Fig. 1a). There are two large islands in the Irish Sea (the Isle of Man and Anglesey) along with numerous smaller islands. There is a deeper channel along the west of the Irish Sea, with shallower regions to the east such as Liverpool Bay. The deepest part of this main channel is 250 m (found in the North Channel), but typical depths are around 100 m. Water depths are generally 20 – 40 m in the shallower regions to the east.

The Irish Sea experiences some of the largest tidal ranges in the world, with a (mean) spring tidal range of 12 m at Avonmouth in the Severn Estuary. Tidal ranges are also large in Liverpool Bay (e.g. 10 m in Liverpool), but there are also regions in the west (Arklow – near Dublin) where tidal range is close to zero due to the presence of an amphidromic point [28]. Some regions are associated with very strong tidal currents, particularly where the currents flow around islands and headlands. Spring depth-averaged current

¹<https://doi.org/10.48670/moi-00060>

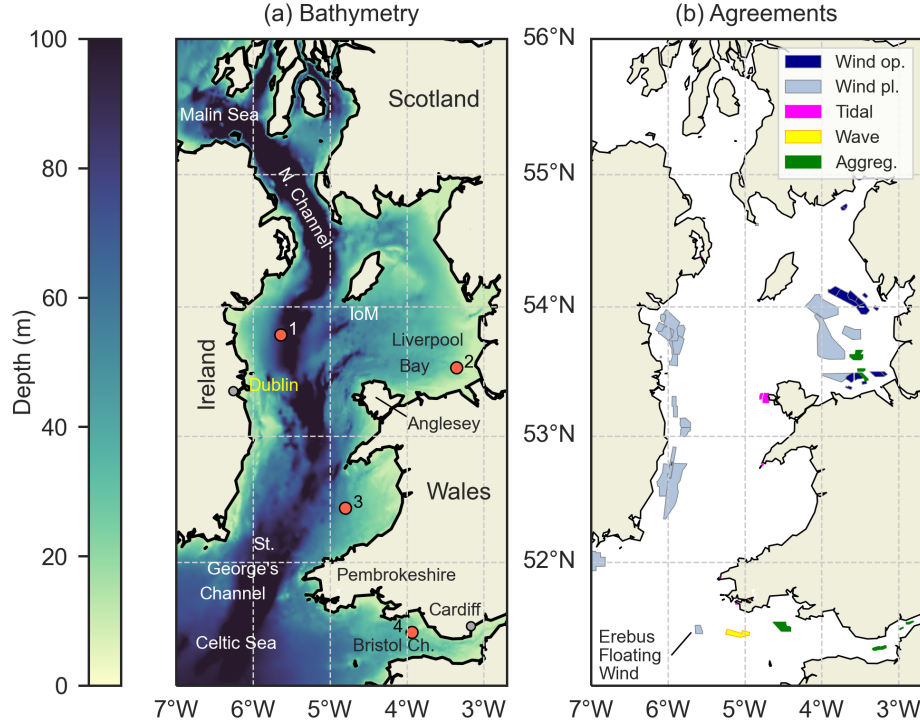


Figure 1: Irish Sea. (a) Bathymetry in metres relative to mean sea level. Red circles are locations of wave buoys used for model validation: 1=AFBI 038A, 2=Liverpool Bay, 3=Cardigan Bay, 4=Scarweather. IoM = Isle of Man. (b) Offshore agreements for wind energy (op. = operational, pl. = planned), tidal stream energy, wave energy, and the extraction of marine aggregates. The location of Erebus Floating Wind Demo is highlighted in (b) as it is used for the co-location analysis presented in Section 4.4.

138 speeds exceed 2.5 m/s in the Skerries to the northwest of Anglesey [29] and
 139 in Ramsey Sound off the coast of Pembrokeshire [30].

140 The Irish Sea is host to much offshore energy activity including present
 141 and future wind farms, planned tidal stream and tidal range projects, and
 142 wave energy arrays (Fig.1b). All tidal and wave projects are in the process
 143 of development, but 13 wind sites, covering 449 km² of seabed, are currently
 144 operational. Many additional wind energy sites are at various stages of plan-
 145 ning, covering a further 3118 km² of sea bed.

146 3. Methods

147 The third-generation spectral wave model SWAN (Simulating WAVes
148 Nearshore) was used to simulate wave climates over the North Atlantic, and
149 within the Irish Sea. SWAN is an Eulerian formulation of the discrete wave
150 action balance equation [31]. The model is spectrally discrete in frequencies
151 and directions, and the kinematic behaviour of the waves is described by
152 the linear theory of gravity waves. SWAN accounts for wave generation by
153 wind, non-linear wave-wave interactions, whitecapping, and the shallow wa-
154 ter effects of bottom friction, refraction, shoaling, and depth-induced wave
155 breaking.

156 The evolution of the action density ($N = E/\sigma$) is governed by the wave
157 action balance equation which, in spherical coordinates, is

$$\frac{\partial N}{\partial t} + \frac{\partial c_\lambda N}{\partial \lambda} + \frac{\partial c_\phi N}{\partial \phi} + \frac{\partial c_\sigma N}{\partial \sigma} + \frac{\partial c_\theta N}{\partial \theta} = \frac{S_{tot}}{\sigma} \quad (1)$$

158 where E is spectral energy density, σ is angular frequency, θ is wave direction,
159 c_λ and c_ϕ are the propagation velocities in the zonal (λ) and meridional (ϕ)
160 directions, c_σ and c_θ are the propagation velocities in spectral space, and
161 S_{tot} represents the source terms, i.e. generation, dissipation, and non-linear
162 wave-wave interactions.

163 Version 41.31 of SWAN was run in third-generation mode, with Komen
164 linear wave growth and whitecapping, and quadruplet wave-wave interac-
165 tions. SWAN default formulations and coefficients were used for all of the
166 physical processes.

167 3.1. Data

168 3.1.1. Wind data

169 Wind data for model forcing was ERA5 – a reanalysis product generated
170 by ECMWF [25]. 10 m components of wind speed (northward and eastward)
171 were extracted 3-hourly over both model domains (outer North Atlantic and
172 inner Irish Sea) at a spatial resolution of $1/4 \times 1/4^\circ$. For the co-location
173 analysis presented in Section 4.4, wind speeds at 100 m height were extracted
174 (to calculate wind power) as this is more consistent with the hub height of
175 wind turbines.

176 3.1.2. Bathymetry

177 Bathymetry at both model scales was interpolated to the model grid
178 points from GEBCO, available at a resolution of 15 arc-seconds.

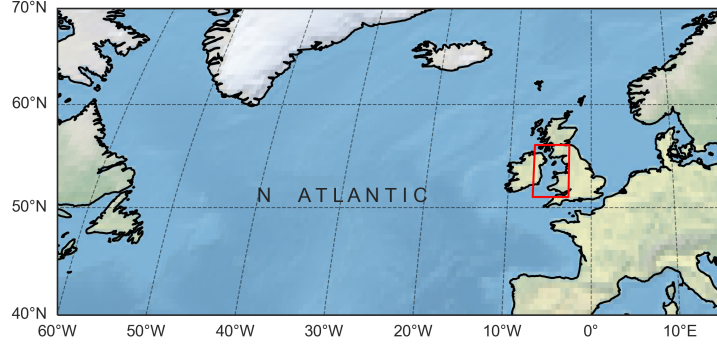


Figure 2: Outer model domain of the North Atlantic wave model. Red box is nested (Irish Sea) region.

179 3.1.3. Wave buoy data

180 Wave data used for model validation was extracted from Cefas-Wavenet.
 181 The data was hourly, and two different years were used for the validation –
 182 2012 and 2020.

183 3.2. Outer Atlantic model

184 Initially, an outer model of the North Atlantic was run, extending from
 185 60°W to 15°E, and 40°N to 70°N (Fig. 2). This model has a spatial resolution
 186 of $1/6 \times 1/6^\circ$. Spectral (directional) resolution of this outer model was 8° (i.e.
 187 45 azimuthal directions). Discretized frequencies were in the range 0.04 – 2.0
 188 Hz, logarithmically distributed into 40 intervals. Three-hourly ERA5 wind
 189 fields were used to force this model, which was run for a full decade (2012-
 190 2021) at a time step of 15 minutes. Since the Irish Sea is sufficiently far
 191 from the boundary (Fig. 2), no boundary conditions were applied to the
 192 North Atlantic model. However, two-dimensional action density spectra were
 193 output every hour along the boundaries of the Irish Sea nested model at a
 194 resolution of $1/12 \times 1/12^\circ$ – a suitable compromise between outer and inner
 195 model resolutions.

196 3.3. Nested Irish Sea model

197 The nested Irish Sea model extended from 7°W to 2.7°W, and 51°N to
 198 56°N (Fig. 1a). This model was developed on a curvilinear grid, with $516 \times$
 199 1011 grid points (i.e. approximately a resolution of $1/120 \times 1/202^\circ$ – a
 200 resolution that is consistent with IEC Technical Specification 62600-101 for
 201 a Class 2 resource assessment [11]). The Irish Sea grid is described further

Station	Lat	Lon	Year	Useable (%)	R^2	$RMSE$ (m)	$S.I.$ (%)	Bias (m)
AFBI 038A	53°47′.03N	5°38′.20W	2020	100	0.939	0.241	20.44	-0.149
Liverpool Bay	53°32′.00N	3°21′.20W	2012	100	0.930	0.247	29.61	-0.173
Cardigan Bay	52°26′.00N	4°48′.00W	2020	98.8	0.948	0.262	17.46	-0.102
Scarweather	51°26′.00N	3°56′.00W	2012	100	0.884	0.239	20.01	-0.045

Table 1: Details of model validation for H_s . RMSE is the Root Mean Square Error, and S.I. is Scatter Index.

in Lewis et al. [10]. The spectral resolution of this model was identical to the outer model of the North Atlantic. In addition to the boundary forcing from the outer model, the inner nest was also forced by three hourly ERA5 wind fields. The Irish Sea model was again run for a decade (2012 – 2021) at a time step of 2 minutes. Model variables such as significant wave height (H_s), energy wave period (T_e), and wave power (calculated using the full wave spectrum) were output at the model grid points every three hours.

3.4. Validation

The inner nested model was validated at four contrasting locations throughout the Irish Sea (Fig. 1a), using one year of hourly² wave buoy data at each location. Two of the locations (Liverpool Bay and Scarweather) were validated throughout 2012, and the other two locations (AFBI 038A and Cardigan Bay) throughout 2020. Agreement between the observations and model are plotted for H_s in Fig. 3, and further details of the validation are provided in Table 1. The validation is an improvement on other, coarser, model studies that incorporate the study region, such as a $1/24 \times 1/24^\circ$ SWAN model of the NW European shelf, forced by ERA-Interim wind fields [27]. For that model, the H_s error metrics calculated for the year 2005 in the middle of the Irish Sea – approximately mid-way between the Cardigan Bay and AFBI 038A wave buoys – were RMSE=0.31 m, Scatter Index (S.I.)=25%, and Bias=-0.16 m.

4. Results

The results focus initially on the fundamental wave properties – H_s , T_e and wave direction – before examining wave power. The results consider both intra- and inter-annual variability.

²The hourly wave buoy data were interpolated to the three hourly model output.

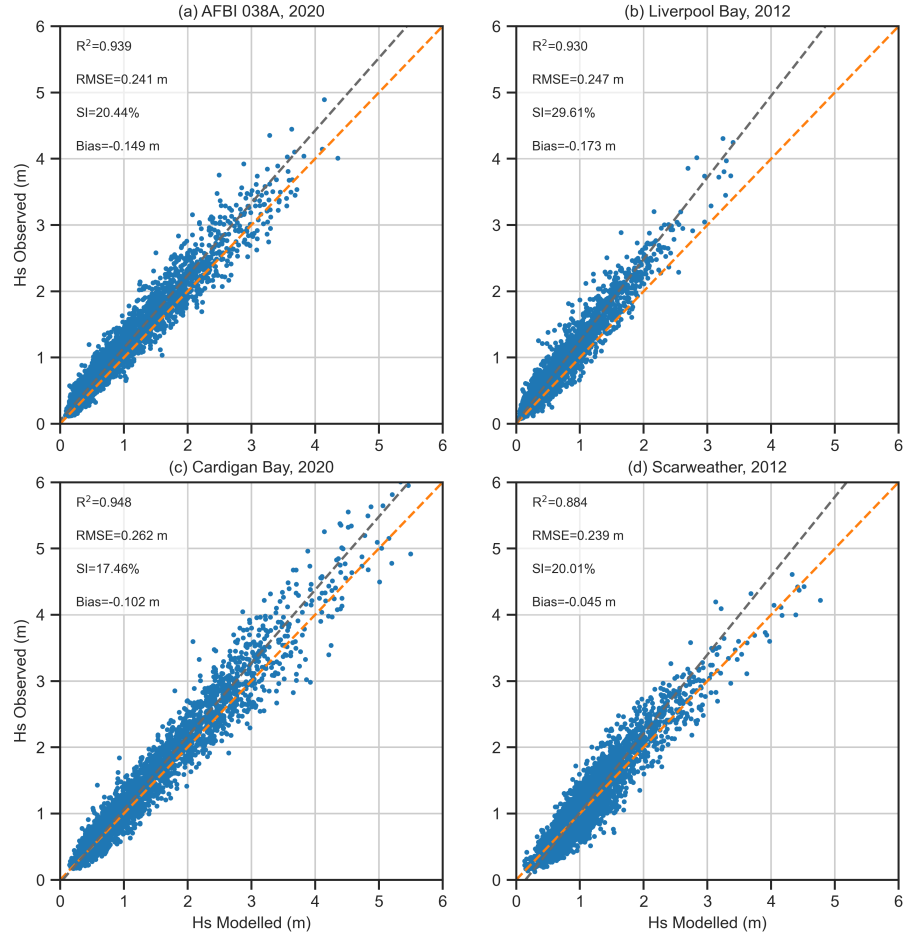


Figure 3: Validation of H_s over one year. Dashed orange line is $x = y$, and dashed grey is line of best fit. Locations of observations shown on Fig. 1a.

227 4.1. Wave height, period and direction

228 The spatiotemporal distribution of H_s is shown as an annual cycle of
 229 monthly means averaged over all 10 years of simulation (Fig. 4). Given the
 230 location of the Irish Sea relative to the North Atlantic, there is a strong sea-
 231 sonal cycle of H_s , with more energetic autumn/winter months (January to
 232 March and October-December) compared to spring/summer months. Mini-
 233 mal wave energy propagates into the Irish Sea via the North Channel, but
 234 swell waves from the Atlantic penetrate from the south (through St. George’s
 235 Channel) as far as Anglesey, particularly when supplemented by local winds.
 236 The largest wave heights are experienced in the Celtic Sea, where the Febru-
 237 ary mean (for example) H_s is around 3 m. Examining the most energetic
 238 year within each month (Fig. 5), it is possible to experience large waves
 239 (maximum values of H_s exceeding 5 m) in the northern part of the Irish Sea
 240 under certain conditions in all months other than July. Examining Febru-
 241 ary 2014 in more detail, the atmospheric conditions that resulted in this
 242 energetic month consist of repeated low pressure systems generated in the
 243 Atlantic propagating across the UK (Fig. 6). Peak wind speed during this
 244 month was 32.5 m/s or 63 knots (4 February 2014 09:00). Some areas that
 245 are persistently sheltered from waves include the north Wales coast and the
 246 Severn Estuary (i.e. upstream of the Bristol Channel) – Fig. 5. To compare
 247 with a previous WAM modelling study that encompasses the Irish Sea, the
 248 maximum value of H_s simulated by a WAM model in Liverpool Bay from
 249 1996 – 2006 was 5.63 m (1997) [32] – comparable to the maximum values in
 250 this region calculated in the current study (Fig. 5).

251 Energy wave period generally follows the distribution of wave heights
 252 (Fig. 7). Longer period (swell waves) are associated with more exposed
 253 locations close to the Celtic Sea, where monthly mean wave periods during
 254 winter months are around 8 s, reducing to around 5 – 6 s in the summer. In
 255 the northern part of the Irish Sea, average wave periods are typically 4 – 5
 256 s at all times of the year.

257 The mean and maximum H_s , T_e and P^3 over the entire decade of simu-
 258 lation are shown in Fig. 8. In the Celtic Sea, the maximum wave height and
 259 period are around 10 m and 16 s, respectively. Applying

$$P_{deep} = \frac{\rho g^2}{64\pi} H_s^2 T_e \quad (2)$$

³Calculated using the full wave energy spectrum – see Section 4.2.

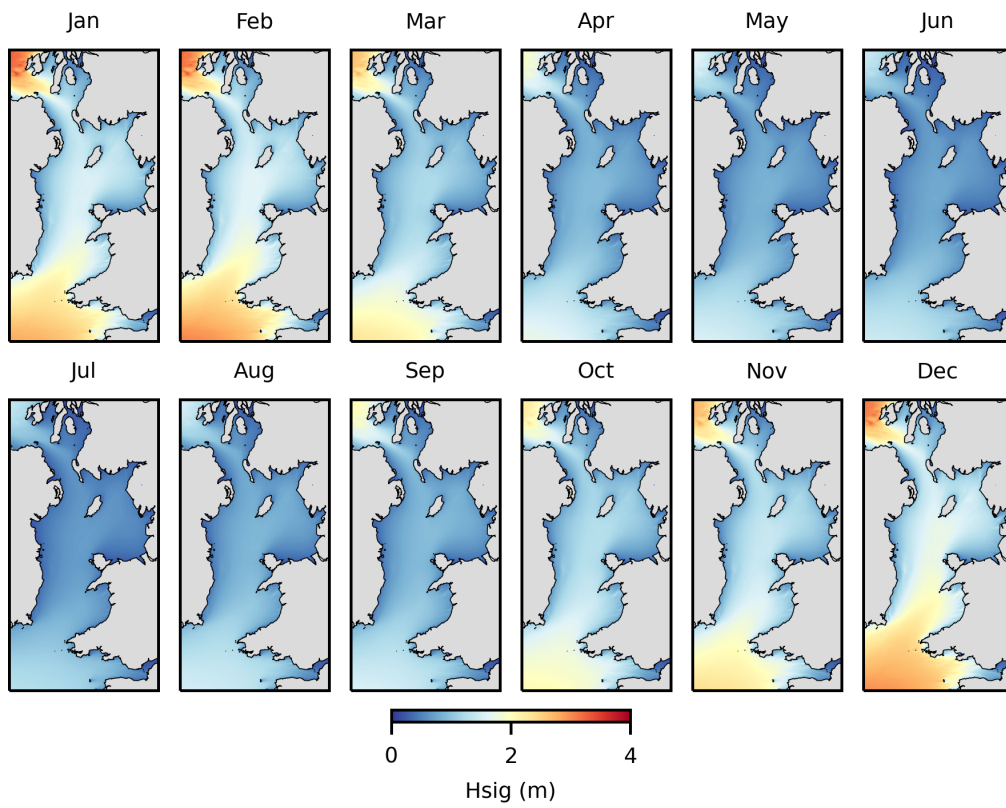


Figure 4: Annual cycle of monthly mean significant wave height averaged over all 10 years (climatological monthly wave height).

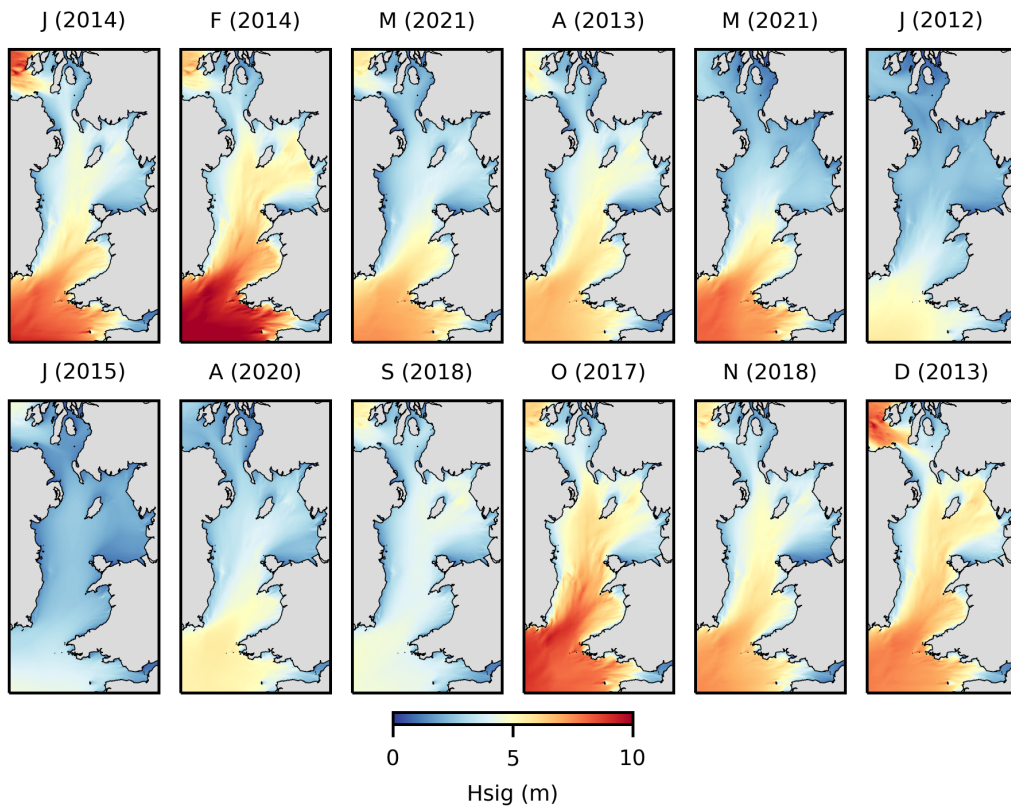


Figure 5: Most energetic years for each month of the year plotted as Hsig. For each month, the most energetic year is given in brackets.

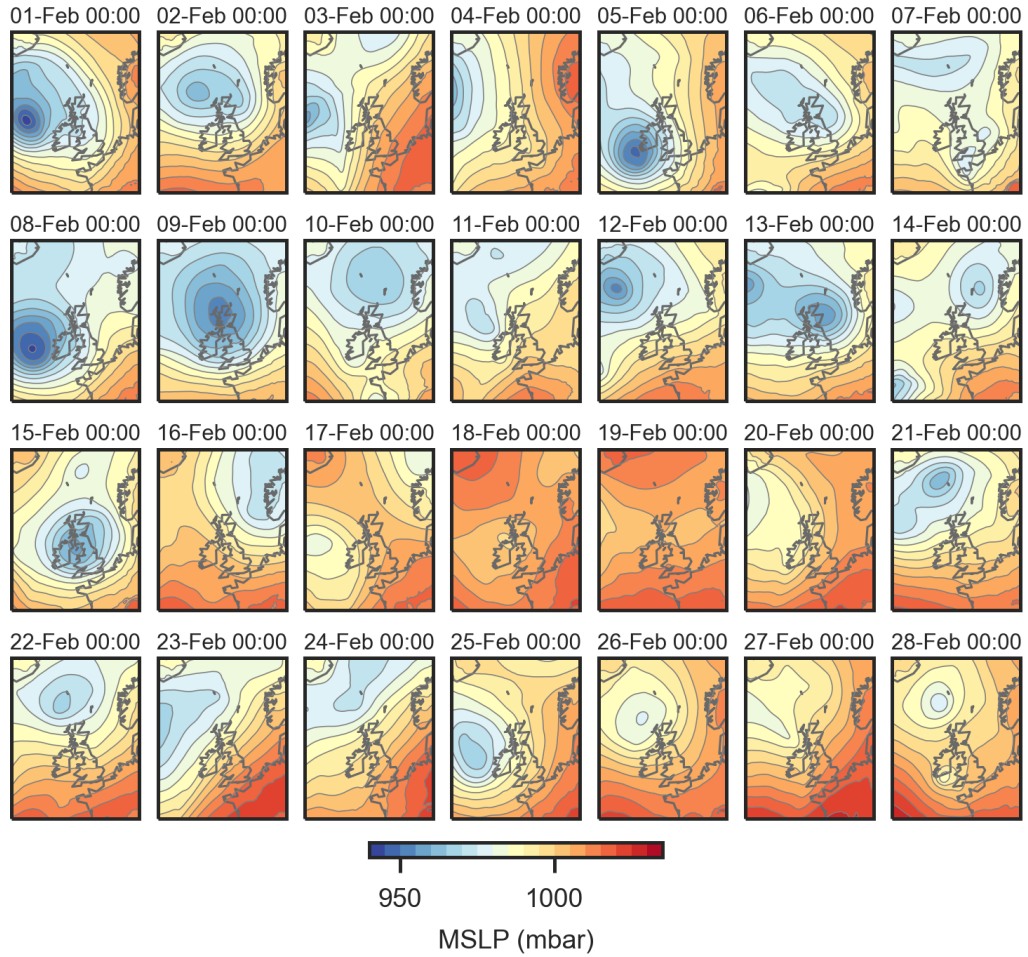


Figure 6: Isobars of mean sea level pressure (in mbar) every 24 hours throughout February 2014 – the month with the largest wave heights over the simulated decade (Fig. 5).

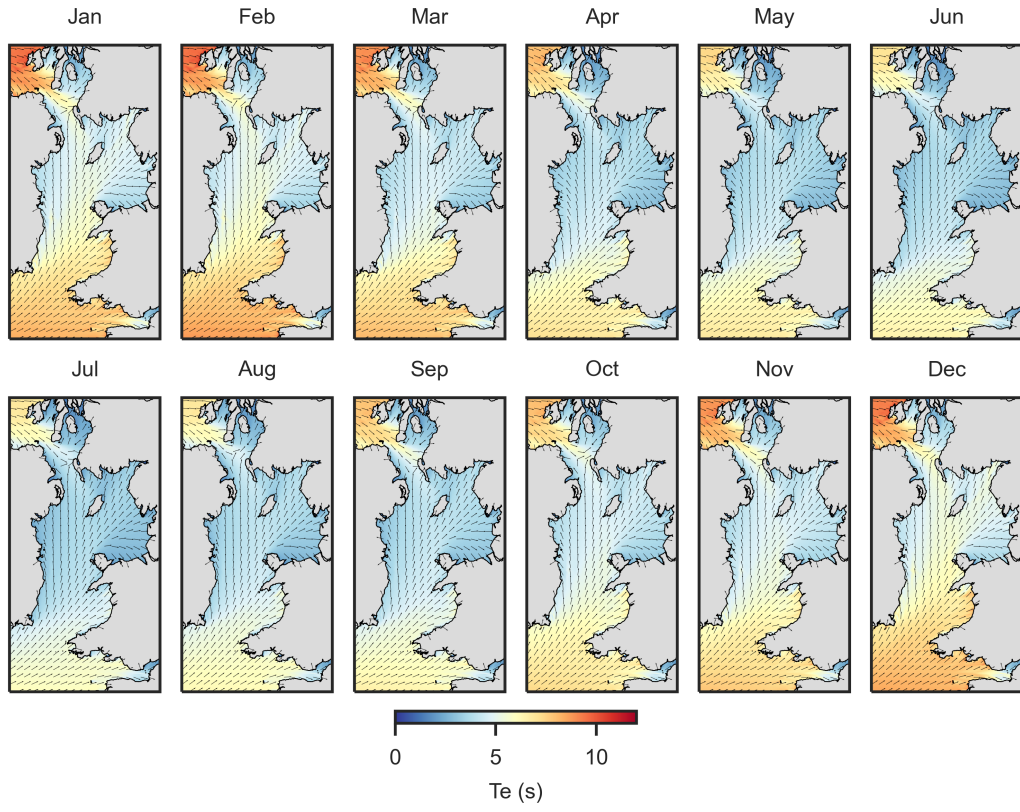


Figure 7: Annual cycle of monthly mean energy wave period (T_e) and wave direction (shown as unit vectors based on the direction of mean energy transport).

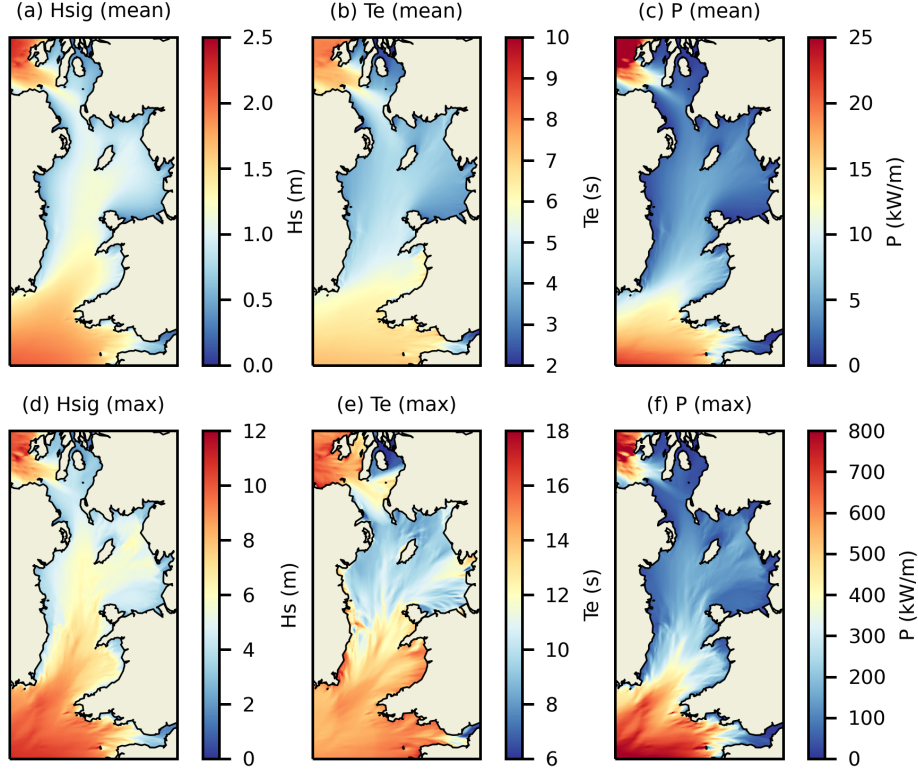


Figure 8: Distribution of mean and peak H_s , T_e and P over the entire decade of simulation. P is directly output from the SWAN model, based on the full wave energy spectrum.

260 gives a wave power of around 800 kW/m, i.e. corresponding to the peak
 261 value in panel (f). Wave power is examined in more detail in the following
 262 sections.

263 4.2. Wave power

264 The components of wave power (i.e. wave energy flux) were evaluated
 265 internally by SWAN, using

$$P_\lambda = \rho g \int \int c_\lambda E(\sigma, \theta) d\sigma d\theta \quad (3)$$

266 and

$$P_\phi = \rho g \int \int c_\phi E(\sigma, \theta) d\sigma d\theta \quad (4)$$

267 The annual cycle of monthly mean wave power (i.e. climatological monthly
 268 wave power) is shown in Fig. 9. The distribution has much in common with

the distribution of H_s , but since wave power is a function of wave height squared (in addition to wave period), the regions of high wave power are more localized, particularly within the Celtic Sea. Again, there is a strong seasonal trend, with January, February and December (i.e. winter months) associated with high wave power. Wave power is minimal from months April to September.

Uncertainty was calculated using

$$\text{uncertainty} = \frac{ts}{\sqrt{n}} \quad (5)$$

where s is the standard deviation, and $t = 1.833$ is Student's t-value at a confidence level of 90% for $n = 10$ samples (i.e. 10 years). Uncertainty in monthly wave power is shown in Fig. 10, focussing only on the six most energetic months (January to March and October to December). The highest uncertainty occurs during February, followed by December. Expressing uncertainty as a percentage of the mean, February stands out, followed by December.

The decadal mean wave power over a large portion of the Irish Sea is relatively low – in the range 5 – 10 kW/m (Fig. 8c). This is similar to the wave energy resource that is found to the east of Orkney (i.e. the region that is sheltered from the North Atlantic) [6] and most of the Mediterranean [33]. The mean winter resource in the majority of the Irish Sea rarely exceeds 20 kW/m (Fig. 10), and so the main part of the Irish Sea is highly unlikely to support wave energy conversion beyond the testing of scaled prototypes. However, in common with previous, albeit coarser, model studies of wave power that encompass the Irish Sea (e.g. [27]), the most energetic region is the Celtic Sea. In this region, the decadal mean wave power is around 20 kW/m (Fig. 8c), with typical winter means of 30–40 kW/m (Fig. 10). These values are comparable to the west coast of Orkney, at the location of the highly successful EMEC (European Marine Energy Centre) grid-connected wave energy test site [34]. It should be noted that instantaneous wave power can exceed 800 kW/m in the Celtic Sea (Fig. 8f), and so devices would require a survivability mode [35].

4.3. North Atlantic Oscillation (NAO)

Many studies have investigated the impacts of natural climate variability on regional or global ocean waves [36]. Key to these studies are climate indices such as the Arctic Oscillation (AO) and North Atlantic Oscillation

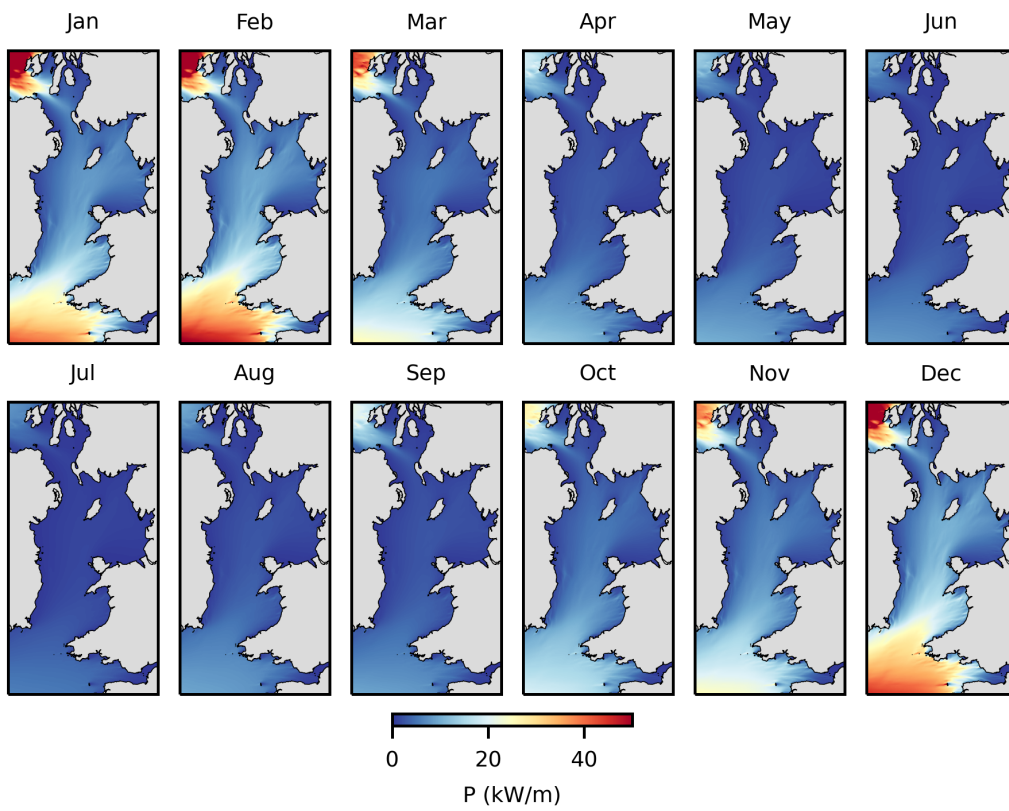


Figure 9: Annual cycle of monthly mean wave power averaged over all 10 years (climato-logical monthly wave power).

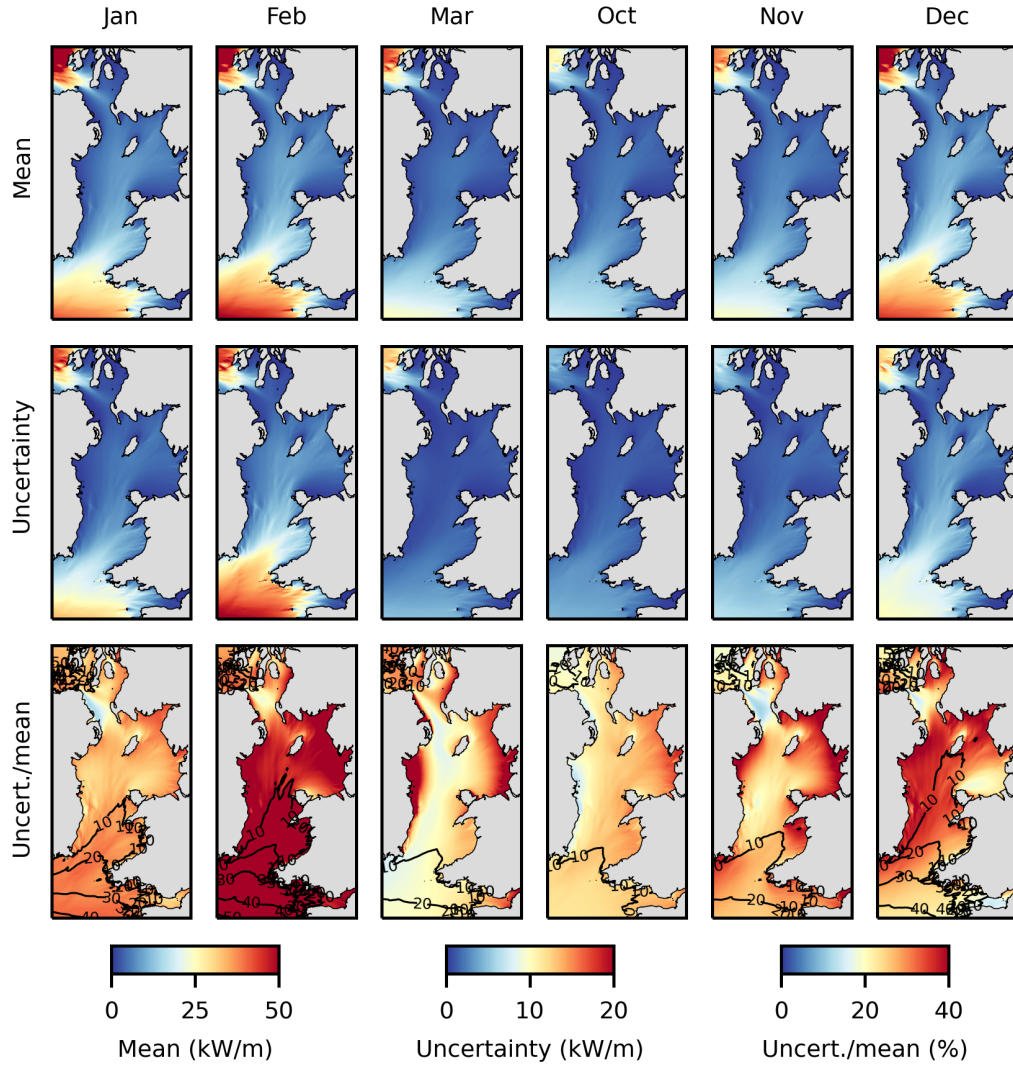


Figure 10: Monthly distribution of mean wave power, wave power uncertainty (90% confidence), and uncertainty expressed as a percentage of mean wave power. Contour values on the bottom panels show mean wave power (i.e. the same data represented in the top row of subplots). Focus is only on the more energetic months (January–March and October–December).

(NAO). The NAO is a climatic phenomenon characterized by fluctuations in atmospheric pressure between the subtropical high over the Azores and the Icelandic Low [37]. The NAO exhibits variability over interannual and decadal timescales. Positive NAO phases are associated with stronger westerly winds and milder winters in northern Europe, while negative phases are associated with weaker westerlies and colder winters. Previous studies have demonstrated that there is a strong correlation between the NAO and wave power in the North Atlantic [38] and in the waters to the north of Scotland [39]. If such a relationship is established for a region or location, this would allow trends in wave power to be explored over long time periods. This relationship is explored here for the most energetic region in the study area – the Celtic Sea.

Wave power was averaged over the region 7°W to 5°W and 51°N to 52°N, capturing the Celtic Sea. Monthly mean wave power over this region was compared against monthly NAO values available from <https://crudata.uea.ac.uk/cru/data/nao/> – an update of the dataset described by Jones et al. [40]. The correlation between NAO and monthly means is shown in Table 2. A threshold of $r \geq 0.5$ was chosen to select only those times of the year when there was a relatively strong relationship between the monthly mean NAO and wave power; therefore only those months where $r \geq 0.5$ are highlighted in bold on the table, corresponding to the period September to March (including the January anomaly where $r = 0.403$). The relationship is not as strong as that reported in the north of Scotland by Mackay et al. – they observed a relatively strong and positive relationship over all months of the year. Here, the continuous period September to March was used to establish a trend between the NAO and monthly mean wave power (Fig. 11). The strength of the relationship over these months is $r = 0.609$ ($r^2 = 0.371$), increasing slightly to $r = 0.623$ ($r^2 = 0.389$) if the January outlier is removed. Therefore, during the months September through to March, higher (positive) NAO values, characterized by stronger westerlies (associated with milder temperatures), results in higher wave power in the Celtic Sea. In contrast, lower (i.e. strongly negative) NAO values are characterized by weaker westerly winds (associated with colder temperatures), and hence reduced wave power in the Celtic Sea.

4.4. Co-location

By developing multiple renewable energy technologies at a single location (co-location) it could be possible to reduce variability in power output and

Month	r
January	0.403
February	0.670
March	0.617
April	0.355
May	-0.087
June	0.040
July	-0.401
August	-0.128
September	0.810
October	0.674
November	0.659
December	0.584

Table 2: Linear Pearson correlation coefficient (r) between monthly NAO and monthly mean wave power averaged over the Celtic Sea (7°W to 5°W and 51°N to 52°N). Those months with $r \geq 0.5$ are highlighted in bold, but note that the continuous autumn-winter-early spring period (September to March) was used for the analysis presented in Fig. 11.

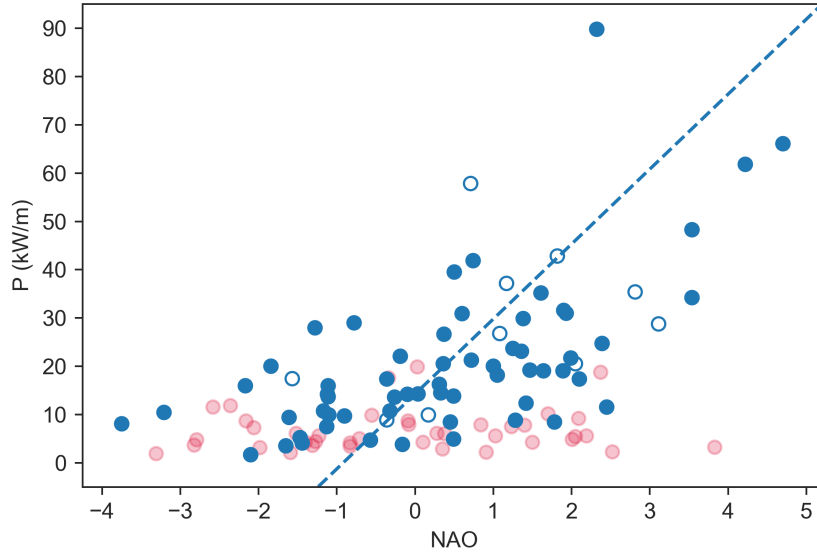


Figure 11: Relationship between monthly NAO index and monthly mean wave power in the Celtic Sea. The dashed trend line ($r^2 = 0.389$) is based on months February, March, September, October, November, December (filled blue circles) and January (open blue circles). Other months are shown as red circles.

340 reduce overall costs due to shared infrastructure [41]. However, regions are
 341 only candidates for co-location if there is a weak correlation between the
 342 two (or more) energy resources, otherwise there are no particular benefits in
 343 diversifying energy conversion technologies, particularly when one technology
 344 (e.g. wave) is considerably more expensive than the other (e.g. offshore
 345 wind). Co-location potential was investigated for the most energetic region
 346 in the study area – the Celtic Sea.

347 The primary renewable energy technology in this region is likely to be
 348 offshore wind; therefore the detailed wind energy resource was examined at
 349 the Erebus Floating Wind Demo site in the Celtic Sea (Fig. 1b) and it was
 350 assumed that wave energy technology could at some stage be incorporated
 351 into this location. Only theoretical power was considered for both resources –
 352 the wave power was based on the full wave spectrum output from the SWAN
 353 model (Section 4.2), and the power density of wind was calculated using

$$\frac{P}{A} = \frac{1}{2} \rho U_{100}^3 \quad (6)$$

354 where A is the swept area of the rotor, ρ is air density, and U_{100} is the
 355 instantaneous (3 hourly) wind speed 100 m above sea level (available as a
 356 variable directly from ERA5). Variability in power was considered over the
 357 entire decade of the wave simulations (2012 – 2021). Typical time series
 358 (where power is normalized by the maximum over the year) is shown for
 359 2012 (Fig. 12). In this sample time series, there are times when wind and
 360 wave are very clearly in phase (e.g. the large events around 3 – 6 January),
 361 and time periods when wind and wave are out of phase (e.g. 26 – 27 January).
 362 Since both resources are seasonal, correlation coefficients were calculated for
 363 each month, capturing all 10 years of simulation over each calendar month
 364 (Table 3). The r^2 is relatively consistent across all months, with a mean
 365 value of 0.502, but with perhaps more potential for co-location during the
 366 months of April ($r^2 = 0.393$) and September ($r^2 = 0.421$). Calculating the
 367 cross-correlation (Fig. 13), there is a lag of around 3 hours between wind
 368 and wave. Therefore, in the Celtic Sea region, there is moderate potential
 369 for co-location between wind and wave – much less so than other regions of
 370 the North Atlantic such as Lanzarote (Canary Islands) where the correlation
 371 coefficient is consistently low ($r^2 < 0.1$) due to a strong swell component [21].

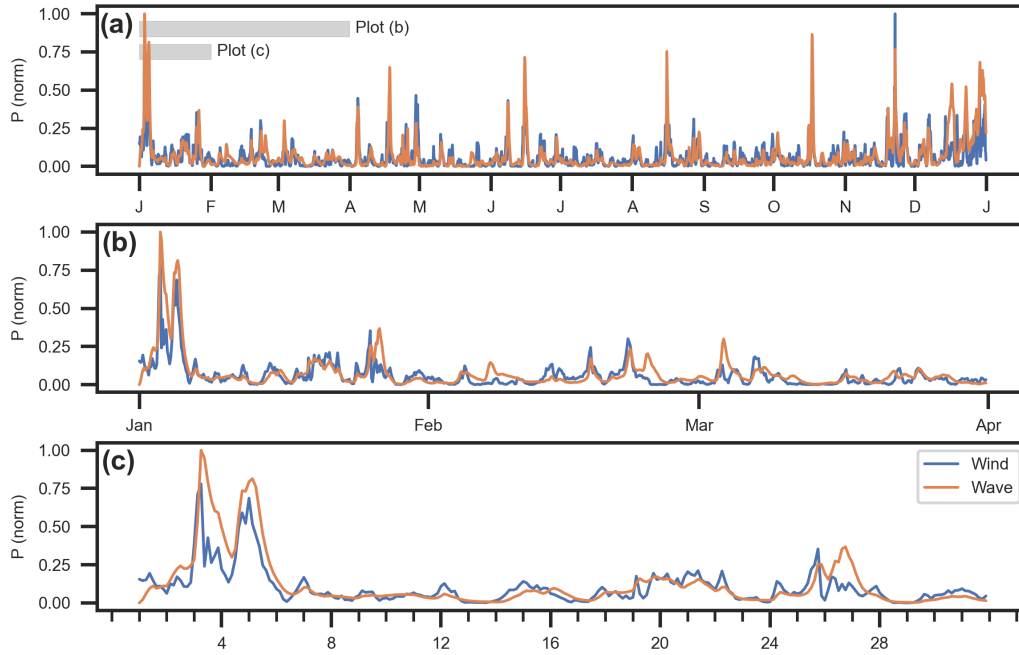


Figure 12: Time series of (normalized) theoretical wind and wave power at the Erebus Floating Wind Demo site in the Celtic Sea during 2012.

Month	r^2
January	0.444
February	0.503
March	0.442
April	0.393
May	0.497
June	0.519
July	0.482
August	0.581
September	0.421
October	0.479
November	0.472
December	0.479
Entire record	0.502

Table 3: Correlation coefficient squared (r^2) between wind and wave power at Erebus Floating Wind Demo during each month (entire 10 year simulation).

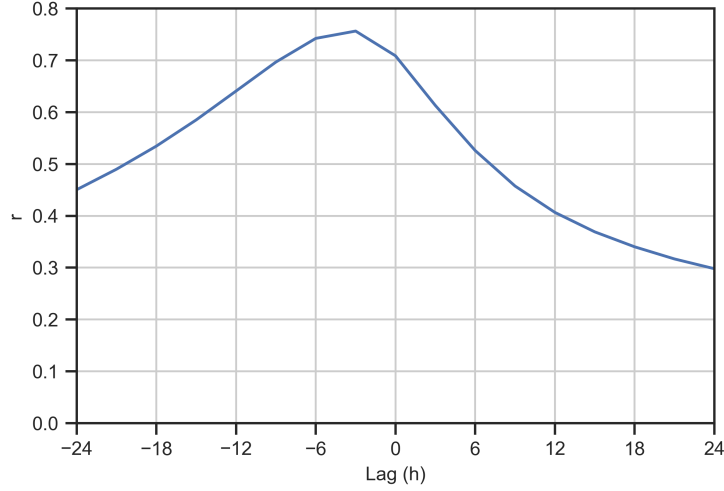


Figure 13: Cross-correlation between wind and wave power at Erebus Floating Wind Demo over the entire 10 year simulation. The maximum correlation was found at -3 h, demonstrating that in general peak wind power leads peak wave power by around 3 h.

372 5. Conclusions

373 This model study has provided insights into the spatiotemporal distribu-
 374 tion and variability of wave properties and wave power in the Irish Sea, with
 375 a particular focus on the energetic Celtic Sea region. The results revealed a
 376 distinct seasonal pattern in wave properties, with larger waves and enhanced
 377 theoretical wave power during autumn and winter months, attributed to
 378 more energetic atmospheric conditions and swell waves propagating from the
 379 North Atlantic. The Celtic Sea is the most energetic region in the study
 380 area, with a mean December wave power that exceeds 30 kW/m.

381 The study investigated the relationship between wave power and the
 382 North Atlantic Oscillation (NAO), which exhibited a relatively strong corre-
 383 lation during the period September to March. This relationship highlights
 384 the potential for using climatic indices like the NAO to predict long-term
 385 trends in wave power, facilitating strategic planning for renewable energy
 386 applications in regions such as the Celtic Sea.

387 Examining co-location potential for renewable energy technologies, con-
 388 sidering wave and offshore wind, the Celtic Sea demonstrated moderate suit-
 389 ability due to a 3 h lag between wind and wave events. Although the potential
 390 for co-location was found to be less promising compared to other regions of

the North Atlantic, this finding could be useful for optimizing the renewable energy mix and reducing costs through shared infrastructure.

Although the study is robust, there are a few ways that it could be improved, i.e. possible areas for future work. Although the priority was to simulate a recent decade, extending the analysis to a longer time period (e.g. several decades) would provide an understanding of how wave power in the Irish Sea has changed over time, for example as a result of climate change. The study focussed on the theoretical resource, but extending to the technical resource, particularly in the Celtic Sea, would further help developers converge on a particular technology type. Finally, the (1D and 2D) wave spectra output from the model could be examined in more detail – interesting extensions could be spectral validation against wave buoys, and characterizing bi-modal sea states.

Acknowledgement

I am grateful to the two anonymous reviewers, whose feedback on an earlier version of the manuscript has improved the paper. The wave model simulations were performed on Supercomputing Wales, part-funded by the European Regional Development Fund (ERDF) and administered by the Welsh Government. The author acknowledges the support of the Natural Environment Research Council (NERC) through SWOT-UK project NE/V009109/1.

Data availability

Model bathymetry, wind forcing and validation data are all publicly available from the sources described in the text. The outputs from the wave model are available on reasonable request, noting that the data size is around 1 TB.

References

- [1] J.-P. Gattuso, A. K. Magnan, L. Bopp, W. W. Cheung, C. M. Duarte, J. Hinkel, E. Mcleod, F. Micheli, A. Oschlies, P. Williamson, et al., Ocean solutions to address climate change and its effects on marine ecosystems, *Frontiers in Marine Science* (2018) 337.
- [2] J. Morim, M. Hemer, X. L. Wang, N. Cartwright, C. Trenham, A. Semedo, I. Young, L. Bricheno, P. Camus, M. Casas-Prat, et al.,

- 422 Robustness and uncertainties in global multivariate wind-wave climate
423 projections, *Nature Climate Change* 9 (9) (2019) 711–718.
- 424 [3] E. V. King, D. C. Conley, G. Masselink, N. Leonardi, R. J. McCarroll,
425 T. Scott, The impact of waves and tides on residual sand transport on
426 a sediment-poor, energetic, and macrotidal continental shelf, *Journal of*
427 *Geophysical Research: Oceans* 124 (7) (2019) 4974–5002.
- 428 [4] S. P. Neill, J. D. Scourse, G. R. Bigg, K. Uehara, Changes in wave
429 climate over the northwest European shelf seas during the last 12,000
430 years, *Journal of Geophysical Research: Oceans* 114 (C6) (2009).
- 431 [5] T. Jackson-Bué, A. J. Evans, P. J. Lawrence, P. R. Brooks, S. L. Ward,
432 S. R. Jenkins, P. J. Moore, T. P. Crowe, S. P. Neill, A. J. Davies, Habitat
433 structure shapes temperate reef assemblages across regional environmen-
434 tal gradients, *Science of the Total Environment* 906 (2024) 167494.
- 435 [6] S. P. Neill, M. J. Lewis, M. R. Hashemi, E. Slater, J. Lawrence, S. A.
436 Spall, Inter-annual and inter-seasonal variability of the Orkney wave
437 power resource, *Applied Energy* 132 (2014) 339–348.
- 438 [7] J. Liu, A. Meucci, Q. Liu, A. V. Babanin, D. Ierodionou, X. Xu, I. R.
439 Young, A high-resolution wave energy assessment of south-east Australia
440 based on a 40-year hindcast, *Renewable Energy* (2023) 118943.
- 441 [8] S. P. Neill, M. R. Hashemi, A. J. Elliott, An enhanced depth-averaged
442 tidal model for morphological studies in the presence of rotary currents,
443 *Continental Shelf Research* 27 (1) (2007) 82–102.
- 444 [9] M. R. Hashemi, S. P. Neill, P. E. Robins, A. G. Davies, M. J. Lewis,
445 Effect of waves on the tidal energy resource at a planned tidal stream
446 array, *Renewable Energy* 75 (2015) 626–639.
- 447 [10] M. J. Lewis, T. Palmer, R. Hashemi, P. Robins, A. Saulter, J. Brown,
448 H. Lewis, S. Neill, Wave-tide interaction modulates nearshore wave
449 height, *Ocean Dynamics* 69 (2019) 367–384.
- 450 [11] IEC, Technical specification 62600-101: Marine energy – wave, tidal
451 and other water current converters – part 101: Wave energy resource
452 assessment and characterization, Tech. rep., International Electrotech-
453 nical Commission (2019).

- 454 [12] E. Rusu, C. G. Soares, Modeling waves in open coastal areas and harbors
455 with phase-resolving and phase-averaged models, *Journal of Coastal Re-*
456 *search* 29 (6) (2013) 1309–1325.
- 457 [13] J. C. Ortiz-Royero, A. Mercado-Irizarry, An intercomparison of SWAN
458 and WAVEWATCH III models with data from NDBC-NOAA buoys at
459 oceanic scales, *Coastal Engineering Journal* 50 (01) (2008) 47–73.
- 460 [14] J. Monbaliu, R. Padilla-Hernandez, J. C. Hargreaves, J. C. C. Albi-
461 ach, W. Luo, M. Sclavo, H. Guenther, The spectral wave model, WAM,
462 adapted for applications with high spatial resolution, *Coastal Engineer-*
463 *ing* 41 (1-3) (2000) 41–62.
- 464 [15] G. J. Dalton, R. Alcorn, T. Lewis, Case study feasibility analysis of the
465 Pelamis wave energy convertor in Ireland, Portugal and North America,
466 *Renewable Energy* 35 (2) (2010) 443–455.
- 467 [16] C. Guo, W. Sheng, D. G. De Silva, G. Aggidis, A review of the levelized
468 cost of wave energy based on a techno-economic model, *Energies* 16 (5)
469 (2023) 2144.
- 470 [17] C. V. Weiss, B. Ondiviela, X. Guinda, F. del Jesus, J. González,
471 R. Guanche, J. A. Juanes, Co-location opportunities for renewable en-
472 ergies and aquaculture facilities in the Canary Archipelago, *Ocean &*
473 *Coastal Management* 166 (2018) 62–71.
- 474 [18] S. Astariz, G. Iglesias, Selecting optimum locations for co-located wave
475 and wind energy farms. Part I: The Co-Location Feasibility index, *En-*
476 *ergy Conversion and Management* 122 (2016) 589–598.
- 477 [19] E. Gaughan, B. Fitzgerald, An assessment of the potential for co-located
478 offshore wind and wave farms in Ireland, *Energy* 200 (2020) 117526.
- 479 [20] P.-Y. Yin, C.-Y. Cheng, H.-M. Chen, T.-H. Wu, Risk-aware optimal
480 planning for a hybrid wind-solar farm, *Renewable Energy* 157 (2020)
481 290–302.
- 482 [21] D. Christie, S. P. Neill, P. Arnold, Characterising the wave energy
483 resource of Lanzarote, Canary Islands, *Renewable Energy* 206 (2023)
484 1198–1211.

- 485 [22] S. Pan, Y. Chen, J. Wolf, Y. Du, Modelling of waves in the Irish Sea:
486 effects of oceanic wave and wind forcing, *Ocean Dynamics* 59 (6, SI)
487 (2009) 827–836.
- 488 [23] A. J. Souza, J. M. Brown, J. J. Williams, G. Lymbery, Application
489 of an operational storm coastal impact forecasting system, *Journal of*
490 *Operational Oceanography* 6 (1) (2013) 23–26.
- 491 [24] H. L. Tolman, the WAVEWATCH III Development Group, User man-
492 ual and system documentation of WAVEWATCH III TM version 4.18,
493 Technical note, MMAB Contribution 276 (316) (2014).
- 494 [25] H. Hersbach, B. Bell, P. Berrisford, S. Hirahara, A. Horányi, J. Muñoz-
495 Sabater, J. Nicolas, C. Peubey, R. Radu, D. Schepers, et al., The ERA5
496 global reanalysis, *Quarterly Journal of the Royal Meteorological Society*
497 146 (730) (2020) 1999–2049.
- 498 [26] B. Yang, S. Wu, H. Zhang, B. Liu, H. Shu, J. Shan, Y. Ren, W. Yao,
499 Wave energy converter array layout optimization: A critical and com-
500 prehensive overview, *Renewable and Sustainable Energy Reviews* 167
501 (2022) 112668.
- 502 [27] S. P. Neill, M. R. Hashemi, Wave power variability over the northwest
503 European shelf seas, *Applied Energy* 106 (2013) 31–46.
- 504 [28] H. E. Pelling, J. M. Green, S. L. Ward, Modelling tides and sea-level
505 rise: to flood or not to flood, *Ocean Modelling* 63 (2013) 21–29.
- 506 [29] P. E. Robins, S. P. Neill, M. J. Lewis, Impact of tidal-stream arrays in
507 relation to the natural variability of sedimentary processes, *Renewable*
508 *Energy* 72 (2014) 311–321.
- 509 [30] I. Fairley, P. Evans, C. Wooldridge, M. Willis, I. Masters, Evaluation of
510 tidal stream resource in a potential array area via direct measurements,
511 *Renewable Energy* 57 (2013) 70–78.
- 512 [31] N. Booij, R. C. Ris, L. H. Holthuijsen, A third-generation wave model
513 for coastal regions: 1. model description and validation, *Journal of Geo-*
514 *physical Research: Oceans* 104 (C4) (1999) 7649–7666.

- 515 [32] J. M. Brown, A. J. Souza, J. Wolf, An 11-year validation of wave-surge
516 modelling in the Irish Sea, using a nested POLCOMS-WAM modelling
517 system, *Ocean Modelling* 33 (1-2) (2010) 118–128.
- 518 [33] L. Liberti, A. Carillo, G. Sannino, Wave energy resource assessment in
519 the Mediterranean, the Italian perspective, *Renewable Energy* 50 (2013)
520 938–949.
- 521 [34] S. P. Neill, A. Vögler, A. J. Goward-Brown, S. Baston, M. J. Lewis, P. A.
522 Gillibrand, S. Waldman, D. K. Woolf, The wave and tidal resource of
523 Scotland, *Renewable Energy* 114 (2017) 3–17.
- 524 [35] F. Madhi, R. W. Yeung, On survivability of asymmetric wave-energy
525 converters in extreme waves, *Renewable Energy* 119 (2018) 891–909.
- 526 [36] J. Liu, A. Meucci, I. R. Young, A comparison of multiple approaches to
527 study the modulation of ocean waves due to climate variability, *Journal*
528 *of Geophysical Research: Oceans* 128 (9) (2023) e2023JC019843.
- 529 [37] J. W. Hurrell, Decadal trends in the North Atlantic Oscillation: Re-
530 gional temperatures and precipitation, *Science* 269 (5224) (1995) 676–
531 679.
- 532 [38] D. K. Woolf, P. Challenor, P. Cotton, Variability and predictability
533 of the North Atlantic wave climate, *Journal of Geophysical Research:*
534 *Oceans* 107 (C10) (2002) 9–1.
- 535 [39] E. B. Mackay, A. S. Bahaj, P. G. Challenor, Uncertainty in wave energy
536 resource assessment. part 2: Variability and predictability, *Renewable*
537 *Energy* 35 (8) (2010) 1809–1819.
- 538 [40] P. D. Jones, T. Jónsson, D. Wheeler, Extension to the North Atlantic
539 Oscillation using early instrumental pressure observations from Gibralt-
540 ar and south-west Iceland, *International Journal of Climatology: A*
541 *Journal of the Royal Meteorological Society* 17 (13) (1997) 1433–1450.
- 542 [41] S. Astariz, C. Perez-Collazo, J. Abanades, G. Iglesias, Towards the op-
543 timal design of a co-located wind-wave farm, *Energy* 84 (2015) 15–24.